



Marine Black

Stacked Stone – Natural Stone Veneer

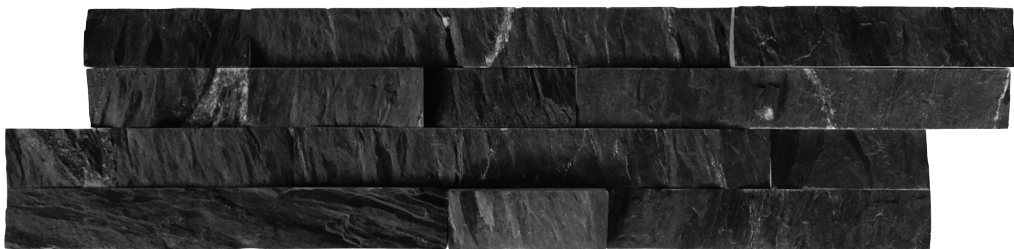

6" x 24" (1.2 cm - 2 cm thick)

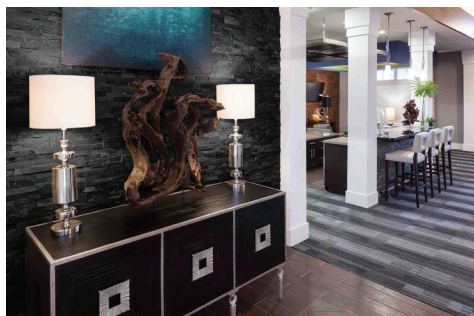

Bar Surround



Exterior



Counter Surround



Wall Cladding



Fireplace



Wall Cladding

Description:

Kayla is a unique architectural wall cladding system with stacked straight-cut natural stone. The mosaic brings out the beauty of mystifying natural colors.

Selection:

Make sure the stone is suitable for your application. Discuss your intended use with your sales representative to confirm that you are specifying the right material for the application.

Installation and Maintenance:

Mosaics can be installed using standard installation methods for thinset adhesives (Laticrete Multipurpose or Multipurpose Pro adhesive are just a few of the options). Cut tiles with clean, new blade utilizing water during the cutting process. Clean regularly with mild neutral detergent, preferably a cleanser specifically for stone. Avoid any acid based cleansers (most lemon / orange scented cleaners). We do recommend sealing the product. Please call your local stone or tile care representative for proper sealing instructions. This product requires no grouting.

Alternative Names:

Stone Veneer, Ledgerstone, Stacked Stone Veneer, Ledger Stone, and Stone Panel

INSTALLATION GUIDE

Basic Guidelines

Step 1:

Surface should be clean, dry, free of debris, have open pores for better adhesion, and structurally sound to be able to support the weight of the material. The interior surface that you are applying the material to can be cement, exterior grade plywood, and gypsum drywall.

Step 2:

Select a 90 degree corner to be your starting point. Start from the bottom and work your way up. Make sure the corner pieces are cut in variation to ensure a natural look.

Step 3:

Apply mortar to the back of the panel and press firmly. A rubber mallet can also help move the tiles for an even finish. Work outward until the level is complete and then work up to your desired height.





Step 4:

Sponge off adhesive residue

INSTRUCTIONS TO FORM RANDOM PATTERN

Basic Guidelines

Each box has 8 regular pieces and 4 wider panel pieces

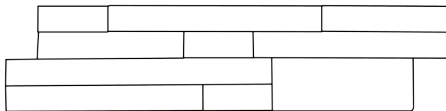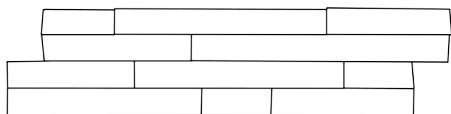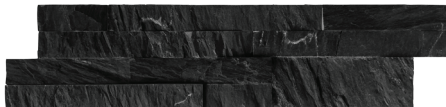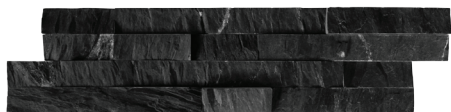

Step 1:

Lay out the pieces so the wide panel piece looks random to ensure a nice look.

Step 2:

We recommend laying out some panels on the floor to check or consult with your installer.



CORNER PIECE INSTALLATION

Step 1:

Corner Panels are used to finish the outside edges to create a natural look. As shown in Figure 1

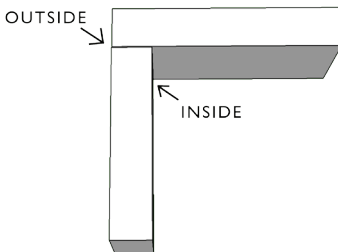


Figure 1

Step 2:

Corner Panels are designed to have rocky edges and are 24" long and 6" high. This covers around one sq/ft. As shown in Figure 2

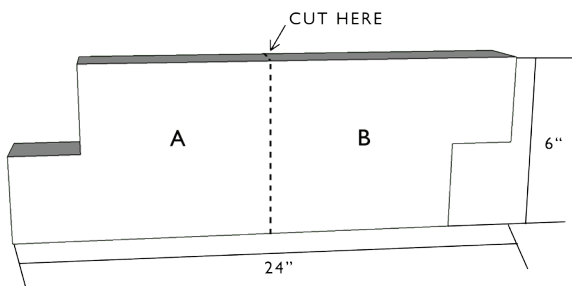


Figure 2

Step 3:

Corner Panels should be cut into 2 pieces in varying lengths. The two end pieces interlock around the outside corner. As shown in Figure 3.

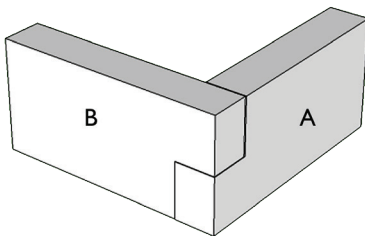


Figure 3

Step 4:

The next set of stone will require removing one of the staggered ends and then place it adjacent to the corner piece. As shown in Figure 4.

Step 5:

Continue staggering the corner pieces in order to create a natural finish

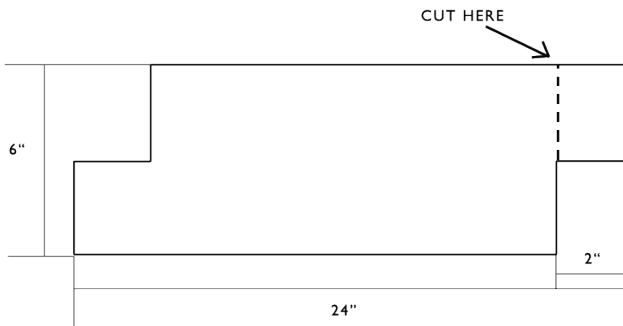


Figure 4



Application:

Tiles can be used on residential or commercial, interior or exterior walls. Common applications include: Bathroom walls, living room, kitchen counter backsplashes, column wraps, furniture fronts, bar counter surround, and other decorative surfaces.



